

**EEEASILY
MORE.**

Excellent. Efficient. Expert.

The Value-Added Modules of the IBC SOLAR Line.

IBC PolySol 260 CS4, 265 CS4

First-class solar modules made of polycrystalline silicon



25 year linear power and 10 year product warranty¹



Positive power tolerance ($-0/+5$ Wp)



Increased mechanical stability (5400 Pa)²



German warrantor



100% tested quality



Maximum transparent ARC glass

IBC SOLAR – a strong global partner for solar power

IBC SOLAR AG has been successful for more than **30 years** and is amongst the leading international energy companies, which provide high-performance system solutions in every size and for every application with intelligent photovoltaic systems. The **economic strength and financial independence** is confirmed by globally recognised rating agencies.

Smart Systems for Solar Power thanks to perfectly matched components. **More than 1,000 highly qualified partners** around the world, as well as **more than 2,700 megawatts of installed power** and over **160,000 photovoltaic systems** all underline the high level of expertise of IBC SOLAR.

Convince yourself of the energy solutions by IBC SOLAR!



OHSAS
18001:2007
ISO 9001:2008
ISO 14001:2004
www.tuv.com
ID: 9105069440



IEC 61215
IEC 61730
www.tuv.com
ID: 0000033285



**Engineered in
GERMANY**

The ideal solution for:



TECHNICAL DATA

IBC PolySol	260 CS4	265 CS4
Article number	2203800017	2203800018

Electrical data (STC):		
STC Power Pmax (Wp)	260	265
STC Nominal Voltage Umpp (V)	31.1	31.4
STC Nominal Current Imp (A)	8.37	8.44
STC Open Circuit Voltage Uoc (V)	38.1	38.6
STC Short Circuit Current Isc (A)	8.98	9.03
Module Efficiency (%)	15.9	16.2
Power Tolerance (Wp)	-0/+5	-0/+5

Electrical data (NOCT):		
800 W/m ² NOCT AM 1.5 Power Pmax (Wp)	196.53	199.83
800 W/m ² NOCT AM 1.5 Nominal Voltage Umpp (V)	29.42	29.56
800 W/m ² NOCT AM 1.5 Open Circuit Voltage Uoc (V)	35.86	35.98
800 W/m ² NOCT AM 1.5 Short Circuit Current Isc (A)	7.38	7.48
Relative Efficiency Reduction at 200 W/m ² (%)	2.81	2.83

Temperature coefficient:		
NOCT (°C)	46	46
Tempcoeff Isc (%/°C)	+0.044	+0.044
Tempcoeff Voc (mV/°C)	-120.78	-122.36
Tempcoeff Pmpp (%/°C)	-0.423	-0.423


Operating conditions:	
Max. System Voltage (V)	1000
Application Class	A
Reverse Current Ir (A)	20
Current value string fuse (A)	15
Fuse protection from parallel strings	4

Mechanical properties:	
Dimensions (L × W × H in mm)	1640 × 992 × 40
Weight (kg)	19.5
Load capacity (Pa) ²	5400
Front sheet (mm)	3.2 (low-iron photovoltaic glass and anti-reflective coating)
Frame	anodized aluminium, sturdy hollow-chamber frame
Cells	6 × 10 polycrystalline silicon cells
Connection type	MC4 (IP65)

Warranties and certification:	
Product warranty	10 years ¹
Power warranty	25 years, linear
Certification	IEC 61215, IEC 61730-1/-2 ISO 9001, ISO 14001, OHSAS 18001


Packaging information:	
Number of modules per pallet	26
Number of pallets per 40' container	28
Number of pallets per lorry	30
Dimensions incl. pallet (L × W × H in mm)	1695 × 1135 × 1150
Gross weight incl. pallet (kg)	535.5
Stackability per pallet	3-fold

25 year linear power warranty by IBC SOLAR

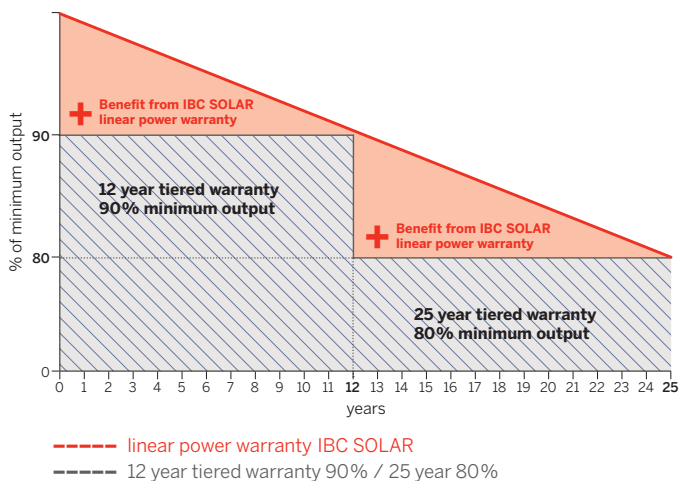

¹⁾ The warranty presupposes installation in accordance with the valid installation instructions.
Standard test conditions: 1000 W/m² irradiation with a spectral distribution of AM 1.5 and a cell temperature of 25 °C. 800 W/m², NOCT. Information according to EN 60904-3 (STC).
All values according to DIN EN 50380. The precise conditions and content can be taken from the respectively valid version of the product and power warranty, which you obtain from your IBC Premium Partner. Subject to errors and modifications.

²⁾ Tested according to IEC 61215 for snow loads up to 5400Pa (5.4 kN/m²).

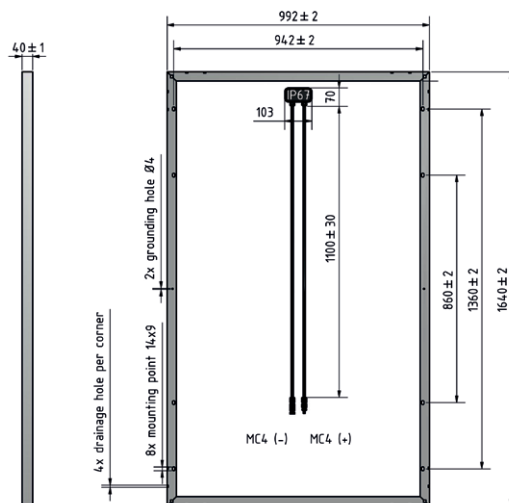

Presented by: